

LOUVALA 300



LED
no
compromise

10 Year
warranty

60598
AS/NZS

IP5x

COI
compliant

Application

Low temperature, long life, sustainable light fixture designed for use at variable mounting heights in workplace, education, healthcare and community projects.

Installation

Flexibility of installation for recess in T-rail, plaster ceilings, surface mount or wire suspension.

Design


Louvre technology with excellent glare control, made in New Zealand.

Sustainability

Designed for long life with Tridonic/Philips/Osram remote driver for easy replacement. Easily reused with new components and recycled at end of life.

Specification Data

Colour Temperature	4000K
Colour Rendering	90Ra
Weight	1200mm 3.8kg
LED Lifetime	L95 @50,000h
Driver Lifetime	100,000h
Cyanosis (COI)	<3.3
Flicker	PSTLM <1.0 SVM <0.4
SDCM	3-Step MacAdam

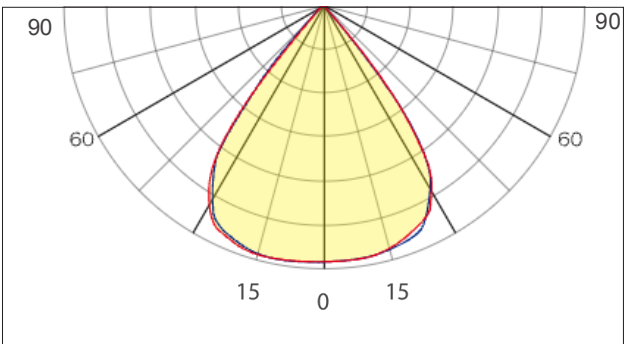

Product Selector

Code	DALI	Casambi	Size (mm)	Lumens	(mA)	Wattage	(lm/W)	Application Notes
LV12321	/DD	/CA	1200x300	2100	350	15	140	For double height spaces and dark ceilings
LV12341	/DD	/CA	1200x300	4150	700	29	143	For double height spaces and dark ceilings
LV12360	/DD	/CA	1200x300	6000	1000	42	143	For double height spaces and dark ceilings
LV06620	/DD	/CA	600x600	2000	375	16	125	For double height spaces and dark ceilings
LV06639	/DD	/CA	600x600	3950	650	27	146	For double height spaces and dark ceilings
LV06661	/DD	/CA	600x600	6100	1000	41	148	For double height spaces and dark ceilings

Photometry taken with black louvre. White louvre photometry available on request.

Accessories

Plaster Kit

Custom Options

CCT, Sizes, Output, Louvre colour, Housing colour
No Red List - Living Building Challenge

