



PARLEDO (M1200)

312600.122.76MAL | Recessed/Lay-in luminaires

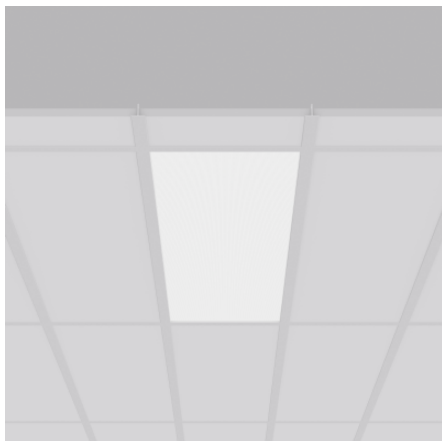

Lay-in luminaires
L 1195, B 295

Lay-in luminaires
white

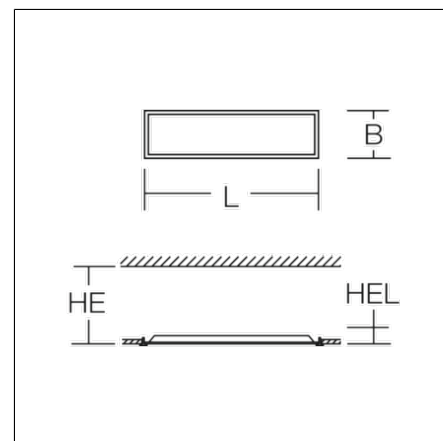


Highly efficient lay-in ceiling luminaire for high hygienic requirements. Particularly suitable for use in healthcare and industry. Housing made of sheet steel, powder-coated. Frameless appearance in the modular ceiling thanks to the extra slim frame. Luminaire frame: aluminium, powder-coated.

Product specifications

Length L	1195 mm
Width B	295 mm
Cut-out length LA	1175 mm
Cut-out width BA	275 mm
Luminaire: recess height HEL	41 mm
Installation space height HE	160 mm
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3200 lm 3750 lm 4350 lm 4850 lm
System power	20 W 24 W 28 W 32 W
System efficiency	152 lm/W 155 lm/W 156 lm/W 160 lm/W
Beam angle	91°/90°
LED rated life	60000h (L80/B50)
Colour rendering index (CRI)	90
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	/ 50 Hz, 60 Hz
Luminaires on B10A fuse	12
Luminaires on B16A fuse	20
Luminaires on C10A fuse	21
Luminaires on C16A fuse	34
Inrush current / Inrush current duration	21 A / 230 µs
Type of protection	IP 65
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	-20 °C to +40 °C
Conformity mark	CE

Accessories



535000.0010.2120
Recessed mounting frame



535000.0008.2120
Surface mounting frame

PARLEDO (M1200)

312600.122.76MAL | Recessed/Lay-in luminaires



535000.11
Airslot frame



535000.11.6
Airslot frame



535000.11.6PB
Airslot frame