



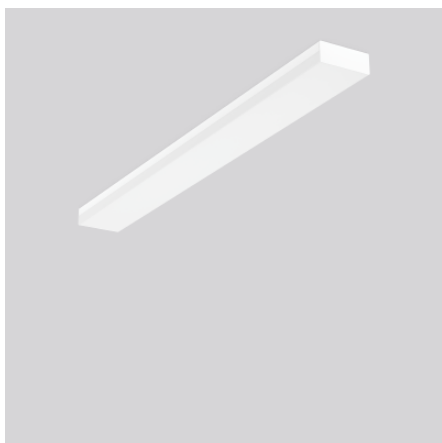

Ceiling and wall luminaires
4068754014335
L 1520, B 160, H 64

Ceiling mounting, pendant, Wall (surface)
white

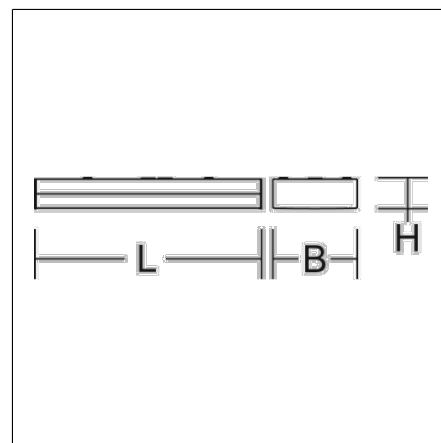

Attractive diffuser luminaires. Base: metal. End caps: plastic, visible screws. Diffuser made of non-yellowing plastic (PMMA), opal. Suitable for Ceiling mounting, pendant, Wall (surface). Convenient, flexible connection option using two rear cable inlets. With 2 centring holes for lateral cable entry. Driver integrated. Suitable for through-wiring. MultiLumen: 4 steps adjustable luminous flux. Factory-set to maximum luminous flux. Resource-saving due to replaceable components.

Product specifications

Length L	1520 mm
Width B	160 mm
Height H	64 mm
Weight	3.25 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	5650 lm 6250 lm 6500 lm 7400 lm
System power	39 W 44 W 46 W 52 W
System efficiency	141 lm/W 142 lm/W 142 lm/W 145 lm/W
Glare evaluation RUG (4H 8H)	23,7 24 24,2 24,6
Beam angle	down 143°/114° up 180°/59°
LED rated life	70000 h (L90/B50) 100000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	23
Luminaires on C10A fuse	23
Luminaires on C16A fuse	36
Inrush current / Inrush current duration	19 A / 240 µs
CIE Flux Code / CEN Flux Code	40 71 91 87 100
Type of protection	IP 40
Protection class	I
Filament test	650 °C
Impact resistance	IK05
Ambient temperature	5 °C to +35 °C
Conformity mark	CE, EAC

PLANIA

312787.002.1 | Surface-mounted luminaires



Accessories



981546.012
Pendant kit

PLANIA

312787.002.1 | Surface-mounted luminaires

