



ROUNDED

582111.004 | Surface-mounted luminaires

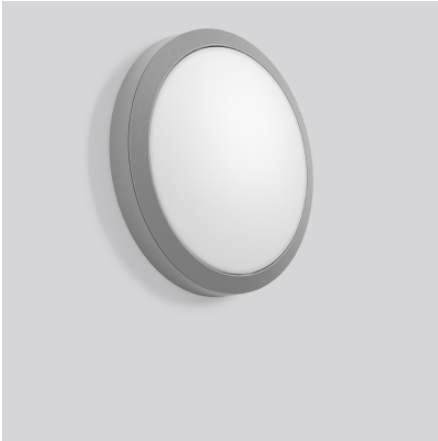

Ceiling and wall luminaires
4068754051019
D 300, H 71

Ceiling mounting, Wall (surface)
silver, matt (approx. RAL 9006)

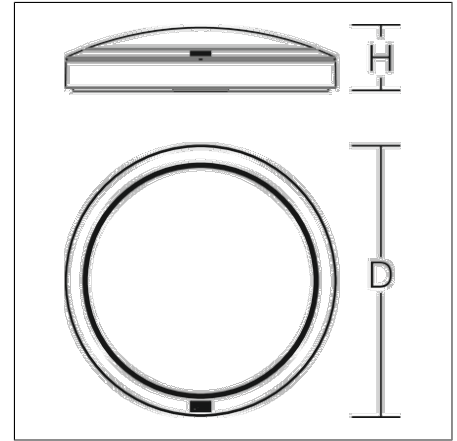

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base and housing made of corrosion resistant pressure die-cast aluminium, seawater-resistant powder-coated (C4, in accordance with ISO 12944-6). C5 coating available on request. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Diffuser: crystal glass (satin finish) with diffuser fixing. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Very easy installation thanks to plug-and-play connector system. Drill hole deviations can be compensated to achieve precise positioning. The large connection compartment on the back for convenient connections is also ideal for through wiring. MultiLumen: 4 steps adjustable luminous flux. Factory preset to lowest luminous flux. MultiColour: Colour temperature adjustable via switching element for 3000 K (factory setting) and 4000 K.

Product specifications

Diameter D	300 mm
Height H	71 mm
Weight	2.73 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux	3000 K: 820 lm 2250 lm 4000 K: 840 lm 2300 lm
System power	3000 K: 9,5 W 26 W 4000 K: 9,5 W 26 W
System efficiency	3000 K: 86 lm/W 87 lm/W 4000 K: 88 lm/W 88 lm/W
Glare evaluation RUG (4H 8H)	3000 K: 21,8 25,3 4000 K: 21,8 25,3
Beam angle	115°
LED rated life	100000h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	45 75 93 99 100
Type of protection	IP 66
Protection class	I
Filament test	960 °C
Impact resistance	IK07
Ambient temperature	-20 °C to +45 °C
Safety marks	D-mark
Conformity mark	CE, EAC

ROUNDED

582111.004 | Surface-mounted luminaires



Spareparts



982970.002
Replacement glass